



## TECHNOFACADE

 MW-EN 13162-T5-DS(70,-)- DS(T23,90)-CS(10)40-TR 15-  
 PL(5)400-WS-WL(P)-MU1 RfF:A1

**EN 13162:2012+A1**  
**1023-CPR-0260 P**


### Product description


TECHNOFACADE is the nonflammable, water-repellent thermal and sound insulation slabs of mineral wool based on basalt rocks.

### Area of application

TECHNOFACADE slabs are used in civil and industrial construction as thermal and sound insulation in systems for the external insulation of walls with a protective decorative layer made of thin plaster coating.

### Storage

The slabs must be stored in covered warehouses. The slabs shall be stored in containers or stacked on the pallets or on the supports during the whole period of storage. The height of the stack shall not exceed 3 meters. Shelf life if all storage requirements are met: 12 months from the date of production.

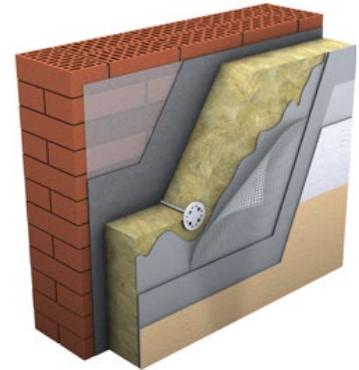

### Main characteristics

Essential characteristics	Performance	Harmonized technical specification	
Declared thermal conductivity at 10°C, W/m*K	50-90 mm – 0.038 100-200 mm – 0.037	EN 12667	EN 13162:2012 + A1:2015
Length, mm	1000, 1200 (±2%)	EN 822	
Width, mm	500, 600 (±2%)	EN 822	
Thickness (with increments of 10 mm), mm	50-200	EN 823	
Deviation from squareness, mm/m	<5	EN 824	
Deviation from flatness, mm	<6	EN 825	
Compressive stress at 10% deformation, kPa	CS(10)40	EN 826	
Tensile strength perpendicular to faces, kPa	TR15	EN 1607	
Point load, N	PL(5)400	EN 12430	
Dimensional stability, %: -at specified temperature -under specified temperature (23°C) and humidity conditions (90% R.H.)	DS(70,-)<1 DS(23,90)<1	EN 1604	
Reaction to fire, euroclass	A1	EN 13501-1	
Water absorption during short / longterm immersion, kg/m <sup>2</sup>	WS<1 / WL(P)<3	EN 1609 / EN 12087	
Water vapor transmission, MU	MU1	EN 12086	

### Thermal resistance (EN 12667)

Thickness, mm	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200
R <sub>D</sub> , m <sup>2</sup> *K/W	1.30	1.55	1.80	2.15	2.45	2.70	2.95	3.25	3.55	3.85	4.15	4.45	4.70	4.95	5.20	5.45