



## ULTRAFLEX SA 7000-X

### Description:

Self-adhesive carrier less SBS-modified bitumen membrane ULTRAFLEX SA 7000-X is designed for waterproofing of foundations and engineering structures with the additional feature of radon protection. The material is produced by placing a special self-adhesive polymer-bitumen binder on a unique high-performance polymer film that covers the material on top. Thanks to the outstanding properties of the film, the membrane has record elongation characteristics and high dimensional stability. The bottom surface of the material is covered with an easy-removable protective film.

### Advantages:

- Record high elongation properties prevent the material from damage caused by movements of the substrate.
- Excellent physical and mechanical characteristics in all directions.
- Prevents radon penetration into the structure.
- The high-quality polymer-bitumen compound has the property of “self-healing”, which gives absolute tightness in places of mechanical penetration.
- High speed of application.
- Safety and cheap application – the membrane is applied without use of gas and flame.
- No need for any additional equipment and skills.
- High reparability.

### General requirements:


- Rolls of the material should be stored indoors in a dry place in their original packaging and taken to the construction site ready to use.
- Rolls should be stored upright in a 1-row height.
- Falls or other mechanical impacts should be avoided during transportation and storage.
- The application surface must be cleaned of dust, debris, grease, leaves, oil and should not have gaps and cracks or other irregularities to ensure proper adhesion of the membrane.
- The application surface must be treated with a primer with the flow resistance not less than the flow resistance of the self-adhesive membrane.
- The material is installed on a primed surface after at least one hour from the primer complete drying.

### Installation:

#### ■ FOUNDATION WATERPROOFING




Clean the surface and treat it with BITUMEN-POLYMER PRIME COATING by TN.

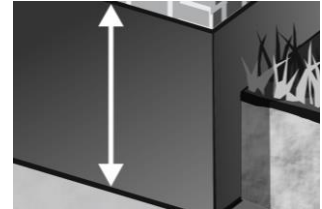

Measure the depth of the foundation and cut the material to the required length.



Apply the material from top downward by gradual removing the protective film, unrolling the membrane and smoothing it to the surface.

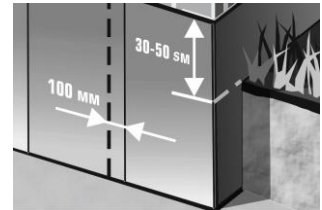


The material to be installed to the height of 30-50 cm above the ground level. Longitudinal overlaps should be 100 mm, sheet end overlaps – 150 mm.



Protect the membrane from mechanical damage by means of XPS TECHNOMICOL CARBON or PLANTER standard / geo profiled HDPE membrane.

The top end of the waterproofing membrane to be fixed at basement level by profiled metal edge strip and sealed.


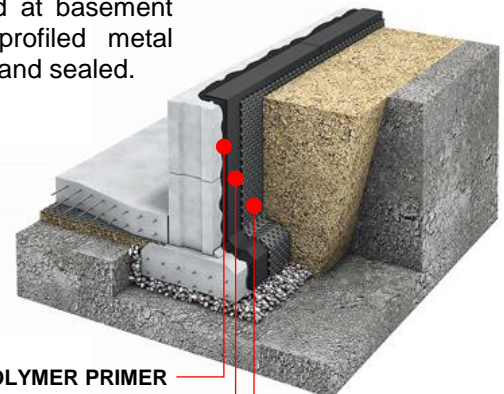


BITUMEN-POLYMER PRIMER  
 ULTRAFLEX SA 7000-X  
 PLANTER standard



**System solutions:**

- **FOUNDATION WITH THERMAL INSULATION**
- **SLAB ON GRADE FOUNDATION**

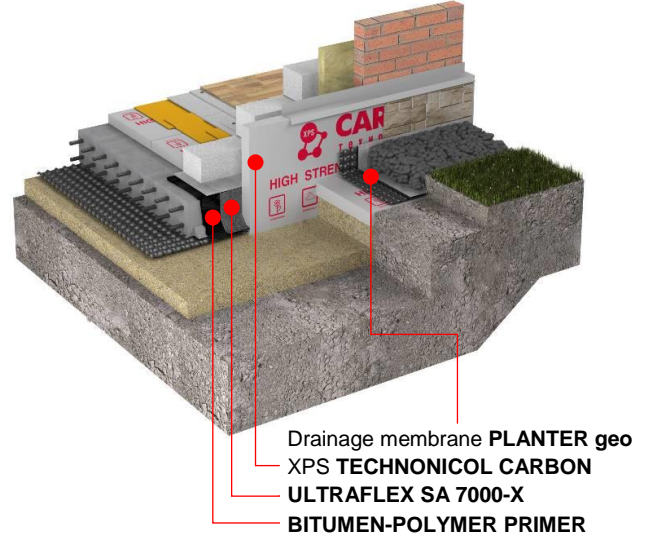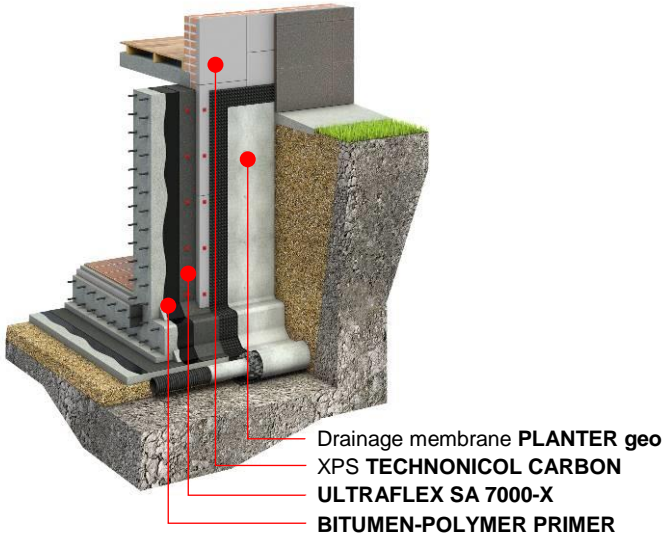

**Directions for use:**

Self-adhesive bitumen membranes in cold periods tend to harden resulting in decreased adhesion. Installation of self-adhesive materials should be performed within the favorable climatic conditions i.e. dry weather and temperatures above +10°C. At temperatures below +10°C and high air humidity the adhesion of the membrane could be compromised and therefore it is necessary to use the hot air to restore characteristics of the material.

**Declared performance:**

Essential characteristics	Test method	Performance	Essential characteristics	Test method	Performance
Protection of the top side	-	<b>high-performance polymer film</b>	Softening point, °C	ASTM D36	<b>≥ +100</b>
Protection of the bottom side	-	<b>self-adhesive binder / anti-adhesion film</b>	Flexibility at low temperature, °C	EN 1109-1	<b>≤ -15</b>
Length, m	EN 1848-1	<b>≥ 20.0</b>	Flow resistance at elevated temperature, °C	EN 1110*	<b>≥ +85</b>
Width, m	EN 1848-1	<b>≥ 1.0</b>	Visible defects	EN 1850-1	<b>Pass</b>
Straightness	EN 1848-1	<b>≤ 10 mm / 5 m</b>	External fire performance	EN 13501-5	<b>Froof</b>
Mass per unit area, kg/m <sup>2</sup>	EN 1849-1	<b>1.75±0.15</b>	Reaction to fire	EN 13501-1	<b>Euroclass E</b>
Thickness, mm	EN 1849-1	<b>1.5±0.10</b>	Watertightness at 60 kPa	EN 1928	<b>Pass</b>
Type of carrier	-	<b>carrier less</b>	Adhesion of granules, %	EN 12039	<b>NPD</b>
Tensile properties: maximum tensile force L / T, N/50mm	ASTM D5147	<b>400±100 / 300±100</b>	Peel resistance of joints: overlap to overlap / overlap to film, N/50mm	EN 12316-1	<b>≥ 25 / NPD</b>
Tensile properties: elongation L / T, %	ASTM D5147	<b>≥ 800 / ≥ 800</b>	Water vapour transmission properties	EN 1931	<b>μ=120000</b>
Determination of shear resistance of joints, kN/m	EN 12317-1	<b>≥ 2.0</b>	Dangerous substances	Does not contain dangerous substances	

\*The samples have to be stuck to the solid base (a piece of plywood, OSB or fiber cement board) before the testing.

Footnotes: L / T – Longitudinal / Transverse; NPD – No Performance Determined.

Shelf life if all storage requirements are met: 12 months from the date of production.