



# NICOBAND

## UNIVERSAL SELF-ADHESIVE SEALANT TAPE



### PROTECTED FROM UV RADIATION

The bitumen layer of NICOBAND sealant tape is protected from UV radiation by aluminum coating. This makes it possible to use the tape outdoor.



### DIFFERENT COLORS

The tape is designed for the most popular roofing colors (including metallic). It allows performing repairs or maintenance in the tone of the main surface without disturbing its form.




### EASY TO USE AND DURABLE

NICOBAND sealant tape is very easy to use and its application requires no special skills. The sealing function of the tape extends for its full lifetime (10 years).



### FLAWLESS ADHESION TO MANY DIFFERENT SURFACES

The self-adhesive layer provides perfect quality adhesion to many different surfaces: metal, slate, smooth wood, plastic, concrete, glass, etc.

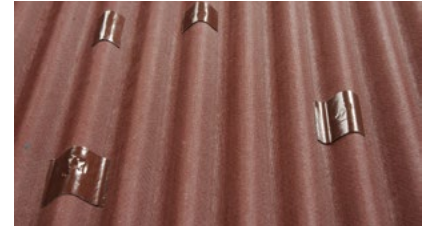

NICOBAND self-adhesive sealant tape is a very convenient way to seal various cracks and joints. Can also be used to insulate junctions, for roofing repairs and for roof repair systems. The special UV protection layer increases its service life outdoors and the assortment of colors makes it suitable for any roof.



**SIZES AVAILABLE:**

WIDTH, cm	5	7.5	10	15	20	30
LENGTH, 3 m	+	+	+	+	-	-
LENGTH, 10 m	-	+	+	+	+	+


TAPE DIMENSIONS, mm	PACKAGE SIZE, mm	QUANTITY IN PACKAGE	WEIGHT OF PACKAGE, kg
3000 x 50	box 240 x 240 x 320	24	5.9
3000 x 75	box 240 x 240 x 320	16	5.9
3000 x 100	box 240 x 240 x 320	12	5.9
3000 x 150	box 240 x 240 x 320	8	5.9
10000 x 75	box 180 x 180 x 320	4	5
10000 x 100	box 180 x 180 x 320	3	5
10000 x 150	box 180 x 180 x 320	2	5
10000 x 200	box 180 x 180 x 320	1	3.5
10000 x 300	box 180 x 180 x 320	1	5

**COLORS AVAILABLE:**



**METHOD OF APPLICATION:**

The surface must be flat, dry and clean. Cut the tape to required length, remove the protective film, stick the tape to the desired area and press it firmly. If the temperature is below +5°C it is necessary to first keep NICOBAND in room temperature for at least 12 hours before application. The use of NICOBAND is not recommended on hot vertical surfaces or on surfaces with a temperature above +80°C.

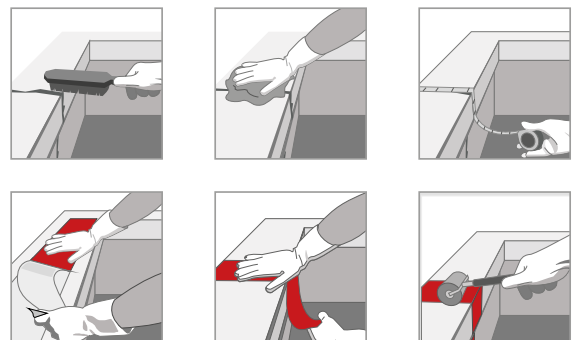

**STORAGE:**

Store in the original packaging in a place protected from atmospheric impact and direct sunlight. Shelf life: 30 months from the date of production.



**TECHNONICOL India Private Limited**  
 Ph: +91 22 2872 8691  
 info@technnicol.in  
 www.technnicol.in

